



ENGINEERED AIR PRODUCTS

# W SERIES EXTERNAL LOUVRES





# SPECIFY WITH CONFIDENCE

## Colman Weather Louvres

- Almost 40 years research and development
- High performance
- Architectural appeal

## Standard Range

Tailored products to meet the precise size, colour and finish required;

- Irregular and complex shapes
- Mitred corners
- Multi-bank assemblies
- Single and Double Doors

## Penthouse Louvres

- Transform roof-top terminals into a design feature
- Integration of access doors

## Continuous appearance Louvres

- Clear unbroken designs
- Integration with cladding systems, glazing systems, brickwork, timbered and cast openings

## Weatherproof features with optimum free airflow, in the most severe conditions;

- Blade profiles have water blow-back, anti cascade traps


Liverpool University



Bolton Railway Station




Manchester Airport

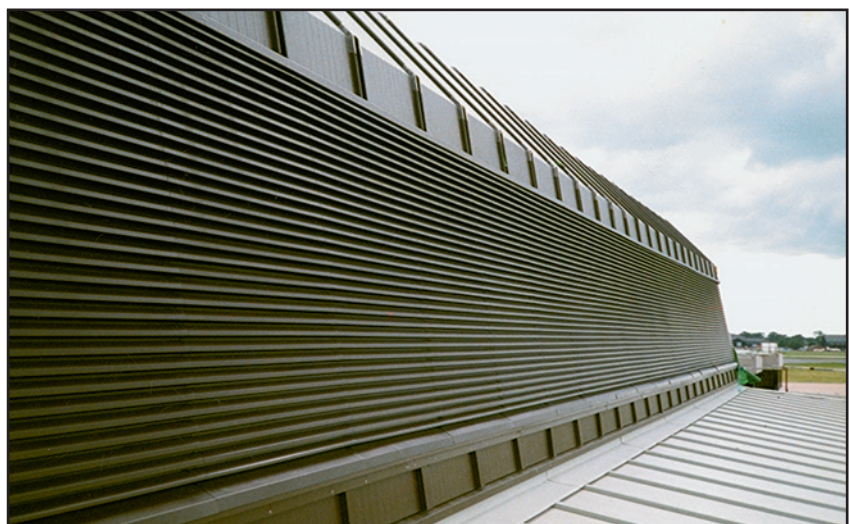


# SHELTERED EXPOSURE

## Type WSA (Flanged)

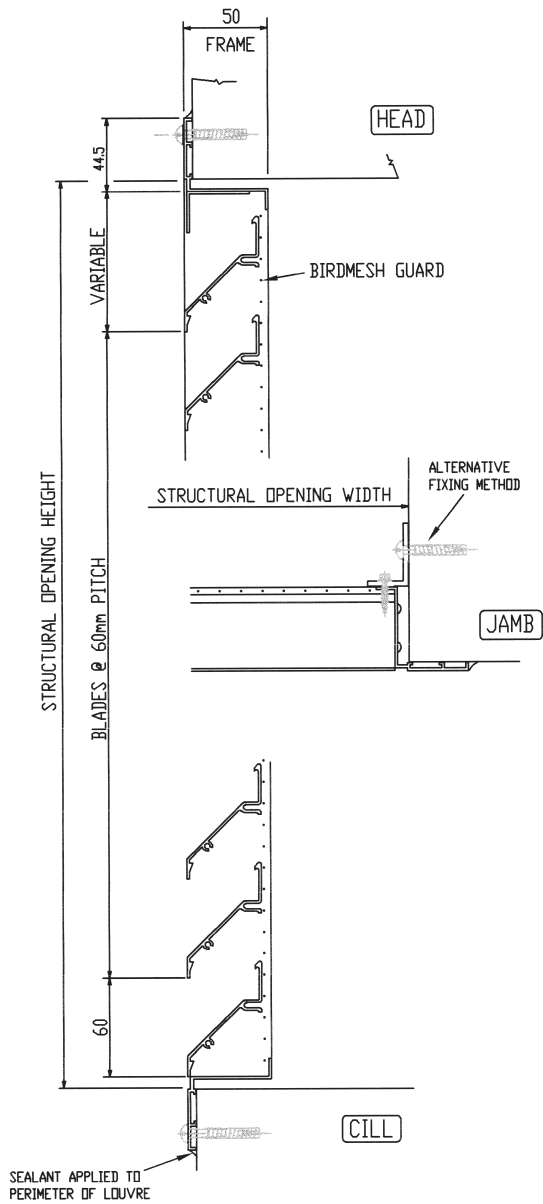

Typical Section Through WSA Louvre

## Type WRA (Flangeless)

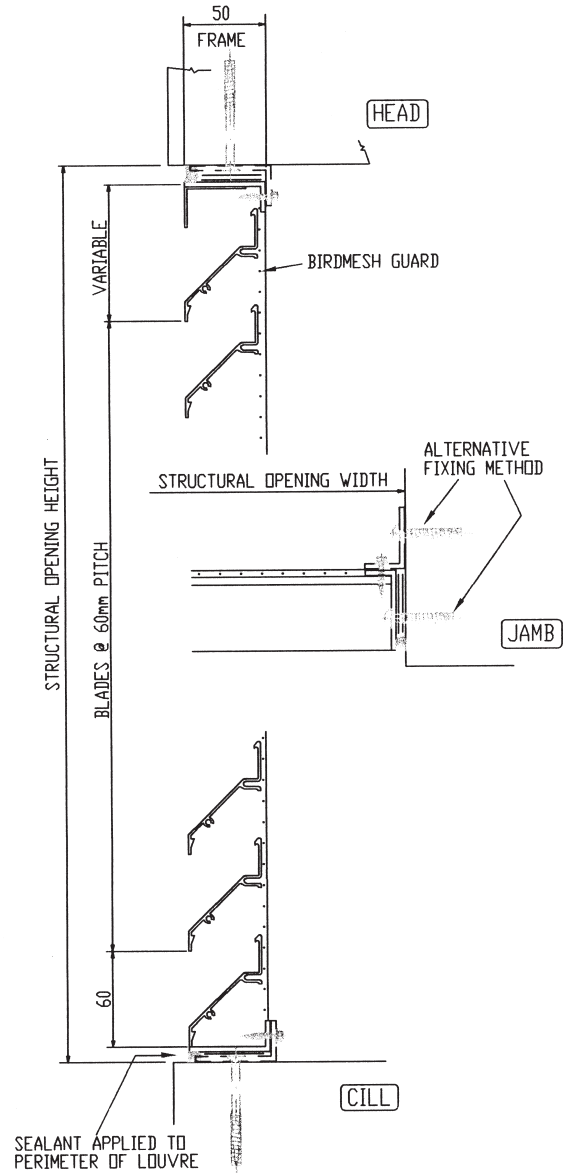


Typical Section Through WRA Louvre

**Blade Style A** Primary usage for individual louvre panels in sheltered conditions

Models	WSA – Flanged for surface mounting within depth of 50 mm. WRA – Flangeless for recessed mounting within depth of 50 mm
Blade Profile	Front & Rear rain lips
Blade Pitch	60mm pitch inclined at 45 degrees
Construction	Single panel construction
Applications	Both regular and irregular shapes, e.g. – circular, triangular,
Dimensions	Single panel 2500mm wide x 1200mm high 1200mm wide x 2500mm high


# MODERATE EXPOSURE

## Type WMB (Flanged)

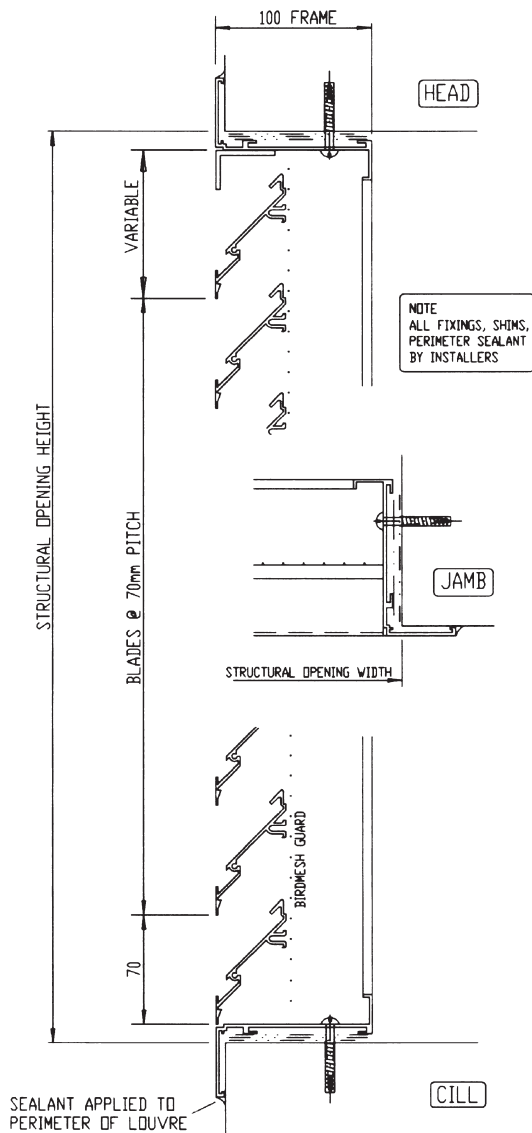

Typical Section Through WMB Louvre

## Type WNB (Flangeless)

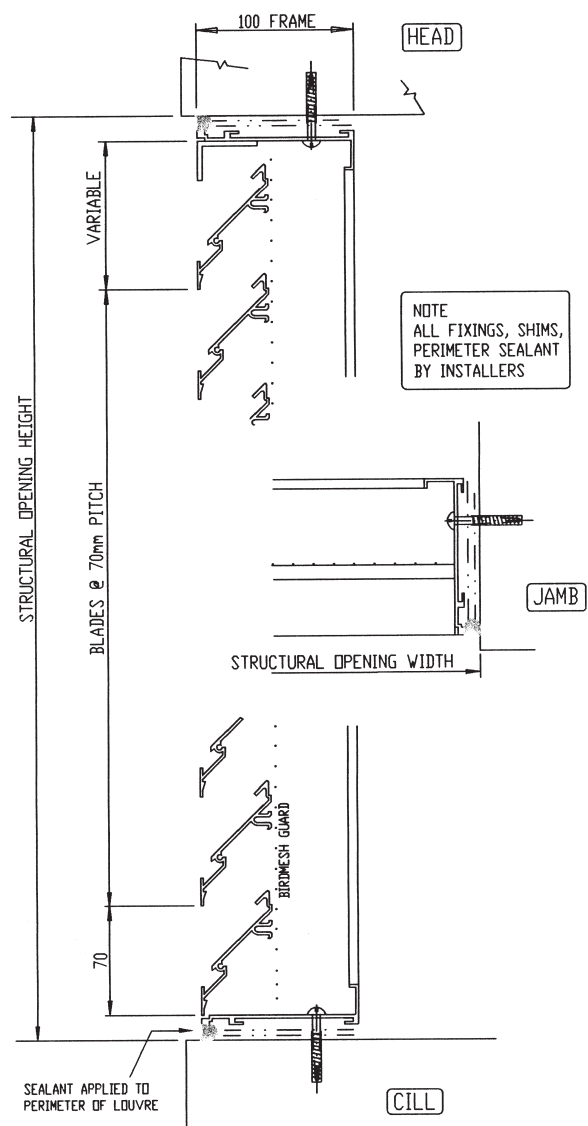

Typical Section Through WNB Louvre


**Blade Style B** Provides increased weathering in moderate exposure conditions

Models	WMB – Flanged for surface mounting within depth of 100 mm WNB – Flangeless for recessed mounting within depth of 100 mm
Blade Profile	Anti-Cascade Traps, Integrated Drainage Channel
Blade Pitch	70 mm inclined at 45 degrees
Construction	Single or Multi-panel construction, visible or non-visible mullions
Applications	Both regular and irregular shapes, e.g. – circular, triangular etc, doors, penthouse louvres, roof top screens & enclosures
Dimensions	Single panel 2500mm wide x 1200mm high 1200mm wide x 2500mm high

No limit to the overall size of multi-bank assemblies with supporting structure being provided where required to meet the specified loadings


# SEVERE EXPOSURE

Type WMV (Flanged)

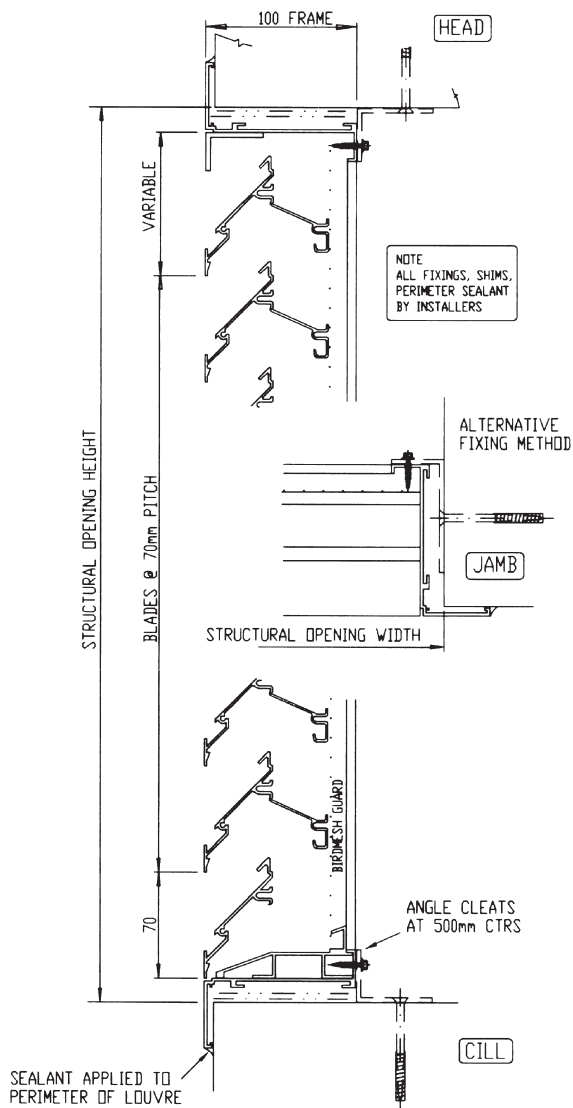

Typical Section Through WMV Louvre

Type WNV (Flangeless)

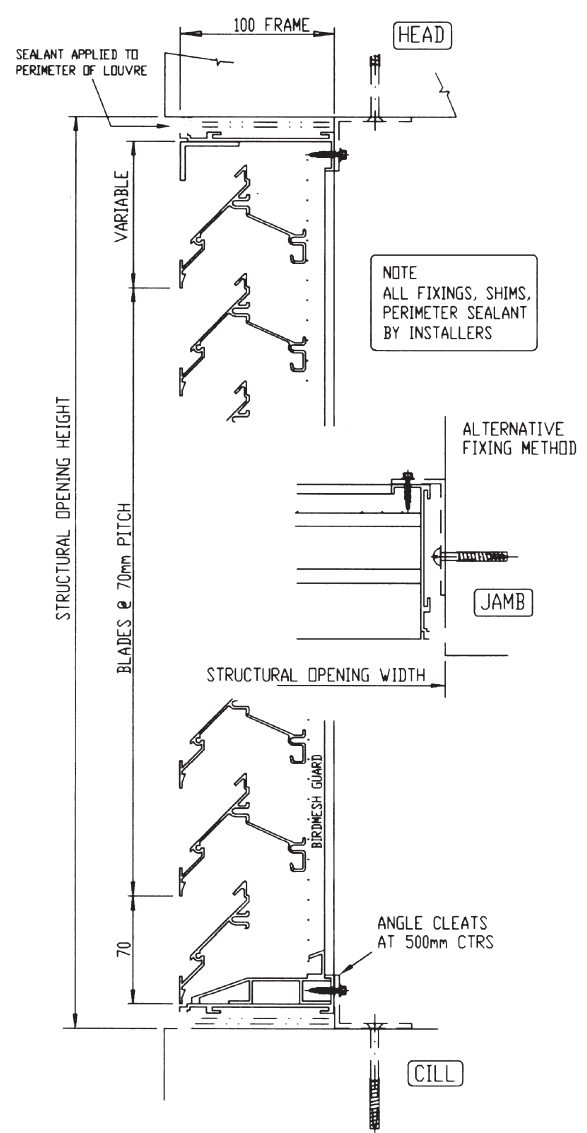

Typical Section Through WNV Louvre


## Blade Style V Provides increased weathering in severe exposure conditions

Models	WMV– Flanged for surface mounting within depth of 100 mm WNV – Flangeless for recessed mounting within depth of 100 mm
Blade Profile	Chevron style double bank, Anti-Cascade Traps, Integrated Drainage Channel & Special Cill Section to collect and drain water away from the louvre assembly
Pitch	70 mm pitch inclined at 45 degrees
Construction	Single or Multi-panel construction, visible or non-visible mullions
Applications	Both regular and irregular shapes, e.g. – circular, triangular etc, doors, penthouse louvres, roof top screens & enclosures
Dimensions	Single panel 2500mm wide x 1200mm high 1200mm wide x 2500mm high

No limit to the overall size of multi-bank assemblies with supporting structure being provided where required to meet the specified loadings



# LOUVRE DOORS


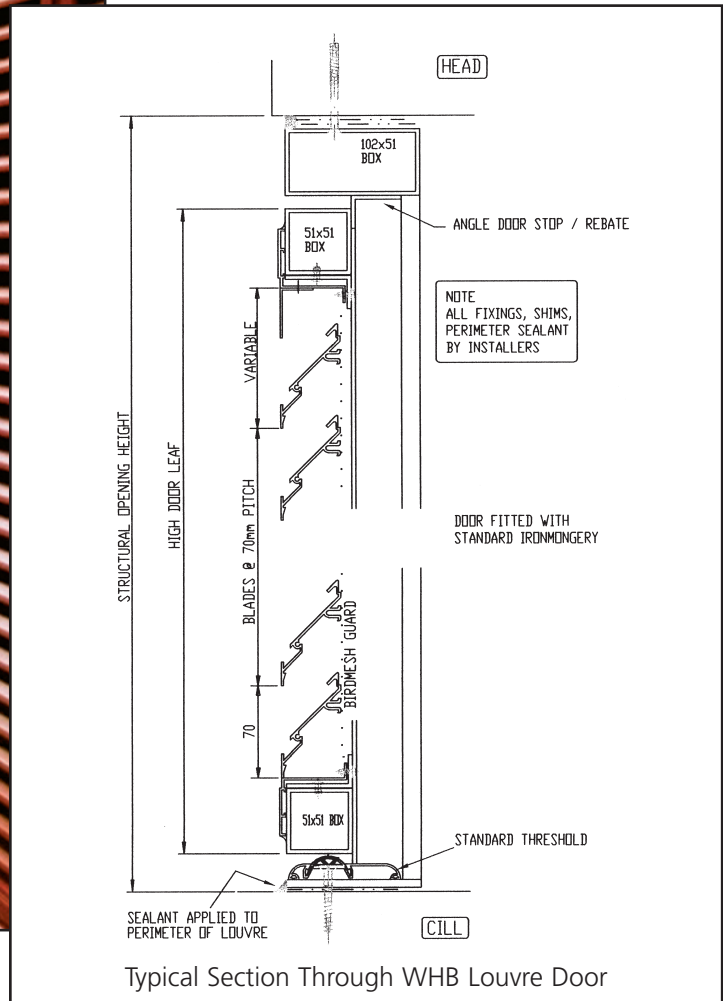


**Type WD (Continuous Line Door)**  
**Type WH (Framed Style Door)**

**Blade Style** Available in A, B, & V blade styles

Models	WD – Continuous blade line door, single or double leaf. WH – Framed style door, single or double leaf
Blade Profile	A - Sheltered, B - Moderate or V - Severe profiles
Pitch	A style – 60 mm pitch inclined at 45 degrees, B & V styles – 70 mm pitch inclined at 45 degrees
Construction Applications	Available as a stand alone Doorset or as an integral Doorset within louvre screening Access doors, Boiler House, Generator / Transformer Rooms, Plant Rooms
Ironmongery	Guardian Imperial Deadlock, Euro Profile Keyed Cylinder & Thumbturn, Doorpulls, Top & Bottom Barrel Bolts to first closing leaf of Double Leaf Doorsets
Dimensions	No limit to the size of single leaf / double leaf doorsets – all are manufactured custom made to suit each particular requirement

# PENTHOUSE LOUVRE

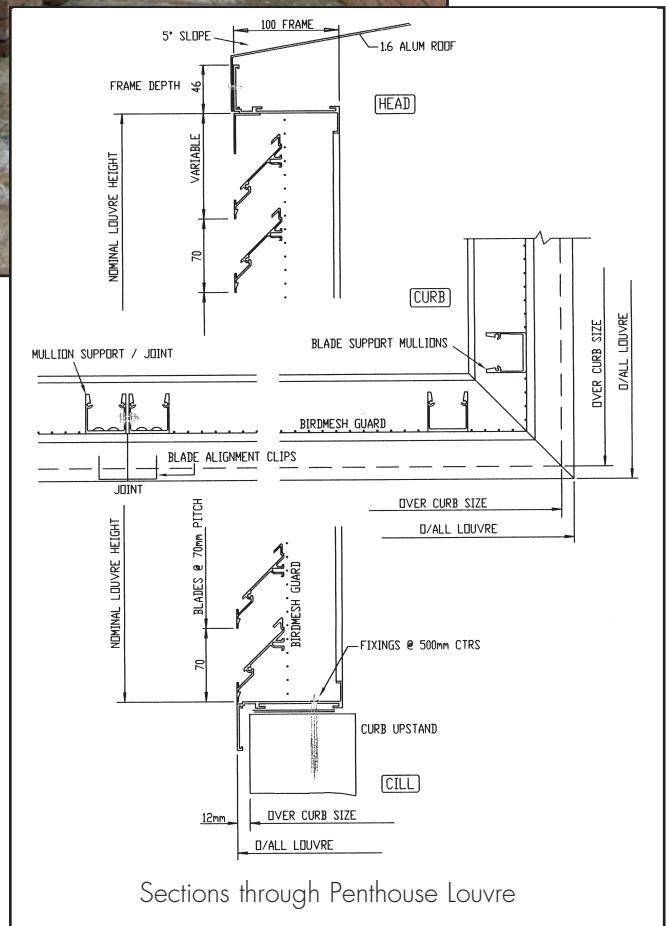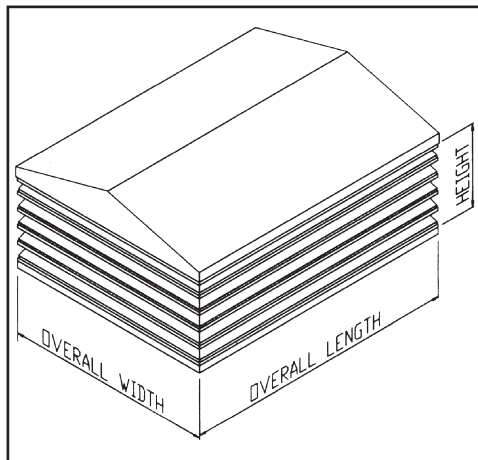


**Type WPB ( Moderate Exposure )**  
**Type WPV ( Severe Exposure )**

**Blade Style** Available in B, & V blade styles


Models	WPB – Flanged for curb mounting - moderate exposure WPV – Flanged for curb mounting - severe exposure
Blade Profile	B - Moderate or V - Severe profiles
Pitch	70 mm pitch inclined at 45 degrees
Construction	Multi panel construction having TIG welded & mitred corners
Applications	Roof top terminals – available with access doors, removable panels and having a ridge roof
Dimensions	No limit to the overall size of multi-bank assemblies with supporting structure being provided where required to meet the specified loadings.

# CIRCULAR LOUVRE

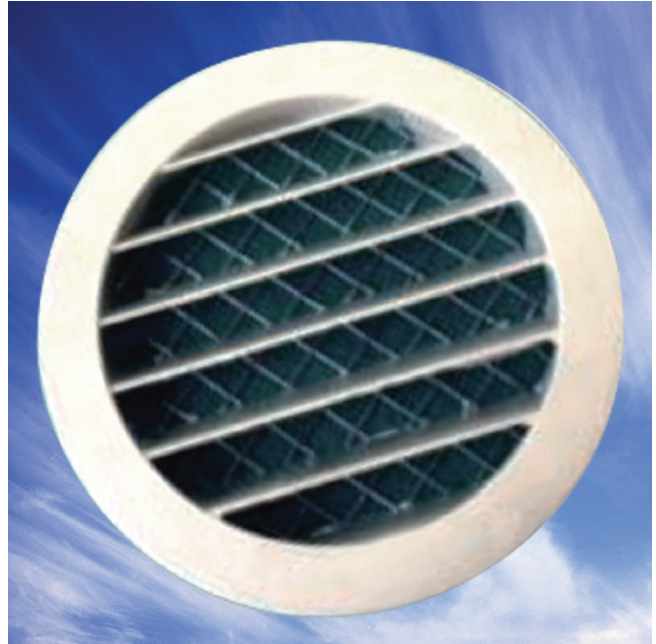

Colman's circular louvre offers an effective solution for direct fitting onto ducts and is supplied with bird mesh as standard. Natural aluminium or powder coated finishes are available.

## PERFORMANCE DATA

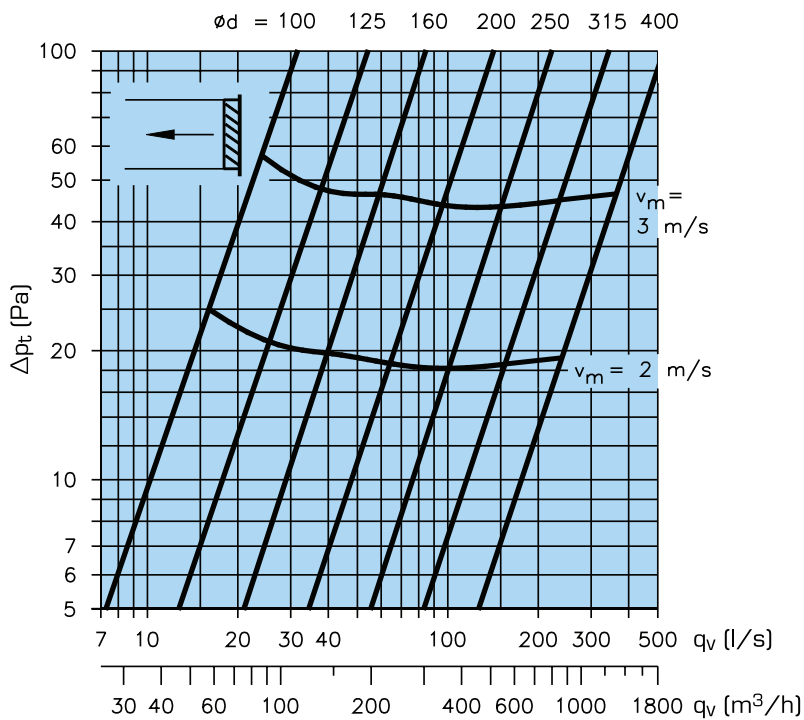

Nominal Size (mm)	Flange Diameter (mm)
100	122
125	150
150	178
160	180
200	222
250	275
300	325
315	345
400	440
500	545
630	660



# THE COMPLETE SERVICE

Colman have an experienced team who will work in close liaison with the Construction team from initial design through to final installation. A fully comprehensive design service is offered with Special Assemblies to the Architect's Specifications being an important part of the Colman service with advice on Applications, Design and Fixing Details readily available. This co-ordinated service will ensure that the louvres are carefully selected, designed and installed for optimum performance and aesthetic appeal.

## Design and Engineering

Working closely with the client, Colman are able to prepare CAD drawings for both approval and construction containing the relevant detail which will accurately reflect the original design concept and enable all trades to interface as necessary with each particular element of the louvre assembly.



## Manufacturing




Manufacturing is carried out in our modern production facilities totaling 18,000 square feet, using machinery and equipment dedicated solely to the manufacture of External Louvre products. Colman are continually aiming to achieve the highest standards of quality throughout all its operations.



# LOUVRE SELECTION GUIDE

## To determine the size of louvre panel required:

1. What is the Volume Flow Rate you want to pass through the louvre? (m<sup>3</sup>/sec)
2. What is the maximum Pressure drop you can accept (pascals)
3. From the pressure drop chart, select the face velocity against your maximum pressure drop
4. Divide the volume flow rate by the face velocity to face the required nett face area

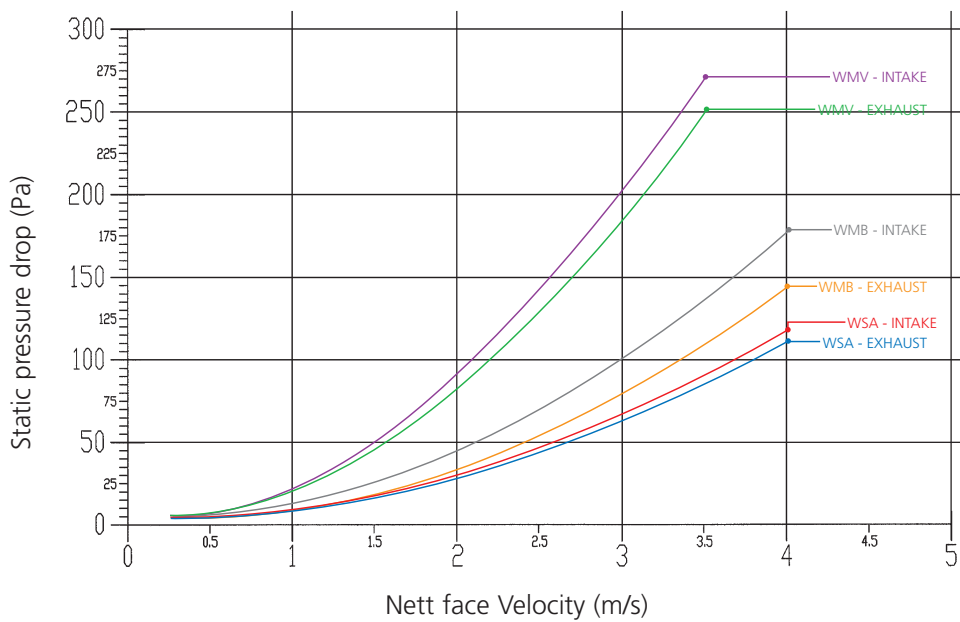

## EXAMPLE

Determine the face velocity and Louvre Panel Size for a Severe Exposure External Louvre (blade type "V") handling a volume flow rate of 2.7 m<sup>3</sup>/sec (intake) with a maximum permissible pressure drop of 50 pascals.

Maximum face velocity (from pressure drop chart) = 1.5m/sec

$$\text{Face Area (m}^2\text{)} = \frac{2.7 \text{ m}^3\text{/sec}}{1.5\text{m/sec}} = 1.8\text{m}^2$$

From the NETT FACE AREA CHART (type B & V blades), select the size of louvre required:

**2500mm wide x 800mm high**

## NOTE

There will be more than one size option, based upon the aspect ration (width x height) of Louvre.


It is important to note the following:

The Effective (Nett) Face Area is: Width of Louvre (m) Height of Louvre (m) minus 1 blade pitch

The Blade Pitch is : type A = 60mm      types B & V = 70mm

The Design Velocity (m/sec) is: Flow Rate (m<sup>3</sup>/sec) ÷ Effective Face Area (m<sup>2</sup>)

# PERFORMANCE

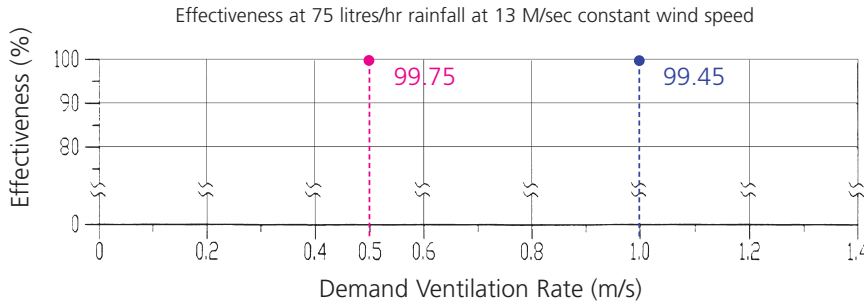

The design wind pressure can be calculated by the reference to the method described in BS6399 Part 2 1997 or the wind loading requirement can be expressed as sheltered, moderate or severe exposure grade.

Exposure	Design Wind Pressure
Sheltered	1500 Pascals
Moderate	1900 Pascals
Severe	2300 Pascals

Effective (nett) Face Area for types "B" & "V" blades																								
Width	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	
Height																								
300	0.066	0.088	0.11	0.132	0.154	0.176	0.198	0.22	0.242	0.264	0.286	0.308	0.33	0.352	0.374	0.396	0.418	0.44	0.462	0.484	0.506	0.528	0.55	
400	0.096	0.128	0.16	0.192	0.224	0.256	0.288	0.32	0.352	0.384	0.416	0.448	0.48	0.512	0.544	0.576	0.608	0.64	0.672	0.704	0.736	0.768	0.8	
500	0.126	0.168	0.21	0.252	0.284	0.336	0.378	0.42	0.462	0.504	0.546	0.588	0.63	0.672	0.714	0.756	0.798	0.84	0.882	0.924	0.966	1.008	1.05	
600	0.156	0.208	0.26	0.312	0.364	0.416	0.468	0.52	0.572	0.624	0.676	0.728	0.78	0.832	0.884	0.936	0.988	1.04	1.092	1.144	1.196	1.248	1.3	
700	0.186	0.248	0.31	0.372	0.434	0.496	0.558	0.62	0.682	0.744	0.806	0.868	0.93	0.992	1.054	1.116	1.178	1.24	1.302	1.364	1.426	1.488	1.55	
800	0.216	0.288	0.36	0.432	0.504	0.576	0.648	0.72	0.792	0.864	0.936	1.008	1.08	1.152	1.224	1.296	1.368	1.44	1.512	1.584	1.656	1.728	1.8	
900	0.246	0.328	0.41	0.492	0.574	0.656	0.738	0.82	0.902	0.984	1.066	1.148	1.23	1.312	1.394	1.476	1.558	1.64	1.722	1.804	1.886	1.968	2.05	
1000	0.276	0.368	0.46	0.552	0.644	0.736	0.828	0.92	1.012	1.104	1.196	1.288	1.38	1.472	1.564	1.656	1.748	1.84	1.932	2.024	2.116	2.208	2.3	
1100	0.306	0.408	0.51	0.612	0.714	0.816	0.918	1.02	1.122	1.224	1.326	1.428	1.53	1.632	1.734	1.836	1.938	2.04	2.142	2.244	2.346	2.448	2.55	
1200	0.336	0.448	0.56	0.672	0.784	0.896	1.008	1.12	1.232	1.344	1.456	1.568	1.68	1.792	1.904	2.016	2.128	2.24	2.352	2.464	2.576	2.688	2.8	
1300	0.366	0.488	0.61	0.732	0.854	0.976	1.098	1.22	1.342	1.464	1.586	1.708	1.83	1.952	2.074	2.196	2.318	2.44	2.562	2.684	2.806	2.928	3.05	
1400	0.396	0.528	0.66	0.792	0.924	1.056	1.188	1.32	1.452	1.584	1.716	1.848	1.98	2.112	2.244	2.376	2.508	2.64	2.772	2.904	3.036	3.168	3.3	
1500	0.426	0.568	0.71	0.852	0.994	1.136	1.278	1.42	1.562	1.704	1.846	1.988	2.13	2.272	2.414	2.556	2.698	2.84	2.982	3.124	3.266	3.408	3.55	
1600	0.456	0.608	0.76	0.912	1.064	1.216	1.368	1.52	1.672	1.824	1.976	2.128	2.28	2.432	2.584	2.736	2.888	3.04	3.192	3.344	3.496	3.648	3.8	
1700	0.486	0.648	0.81	0.972	1.134	1.296	1.458	1.62	1.782	1.944	2.106	2.268	2.43	2.592	2.754	2.916	3.078	3.24	3.402	3.564	3.726	3.888	4.05	
1800	0.516	0.688	0.86	1.032	1.204	1.376	1.548	1.72	1.892	2.064	2.236	2.408	2.58	2.752	2.924	3.096	3.268	3.44	3.612	3.784	3.956	4.128	4.3	
1900	0.546	0.728	0.91	1.092	1.274	1.456	1.638	1.82	2.002	2.184	2.366	2.548	2.73	2.912	3.094	3.276	3.458	3.64	3.822	4.004	4.186	4.368	4.55	
2000	0.576	0.768	0.96	1.152	1.344	1.536	1.728	1.92	2.112	2.304	2.496	2.688	2.88	3.072	3.264	3.456	3.648	3.84	4.032	4.224	4.416	4.608	4.8	
2100	0.606	0.808	1.01	1.212	1.414	1.616	1.818	2.02	2.222	2.424	2.626	2.828	3.03	3.232	3.434	3.636	3.838	4.04	4.242	4.444	4.646	4.848	5.05	
2200	0.636	0.848	1.06	1.272	1.484	1.696	1.908	2.12	2.332	2.544	2.756	2.968	3.18	3.392	3.604	3.816	4.028	4.24	4.452	4.664	4.876	5.088	5.3	
2300	0.666	0.888	1.11	1.332	1.554	1.776	1.998	2.22	2.442	2.664	2.886	3.108	3.33	3.552	3.774	3.996	4.218	4.44	4.662	4.884	5.106	5.328	5.55	
2400	0.696	0.928	1.16	1.392	1.624	1.856	2.088	2.32	2.552	2.784	3.016	3.248	3.48	3.712	3.944	4.176	4.408	4.64	4.872	5.104	5.336	5.568	5.8	
2500	0.726	0.968	1.21	1.452	1.694	1.936	2.178	2.42	2.662	2.904	3.146	3.388	3.63	3.872	4.114	4.356	4.598	4.84	5.082	5.324	5.566	5.808	6.05	

Effective (nett) Face Area for types "A" blades																								
Width	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	
Height																								
300	0.069	0.092	0.115	0.138	0.161	0.184	0.207	0.23	0.253	0.276	0.299	0.322	0.345	0.368	0.391	0.414	0.437	0.46	0.483	0.506	0.529	0.552	0.575	
400	0.099	0.132	0.165	0.198	0.231	0.264	0.297	0.33	0.363	0.396	0.429	0.462	0.495	0.528	0.561	0.594	0.627	0.66	0.693	0.726	0.759	0.792	0.825	
500	0.129	0.172	0.215	0.258	0.301	0.344	0.387	0.43	0.473	0.516	0.559	0.602	0.645	0.688	0.731	0.774	0.817	0.86	0.903	0.946	0.989	1.032	1.075	
600	0.159	0.212	0.265	0.318	0.371	0.424	0.477	0.53	0.583	0.636	0.689	0.742	0.795	0.848	0.901	0.954	1.007	1.06	1.113	1.166	1.219	1.272	1.325	
700	0.189	0.252	0.315	0.378	0.441	0.504	0.567	0.63	0.693	0.756	0.819	0.882	0.945	1.008	1.071	1.134	1.197	1.26	1.323	1.386	1.449	1.512	1.575	
800	0.219	0.292	0.365	0.438	0.511	0.584	0.657	0.73	0.803	0.876	0.949	1.022	1.095	1.168	1.241	1.314	1.387	1.46	1.533	1.606	1.679	1.752	1.825	
900	0.249	0.332	0.415	0.498	0.581	0.664	0.747	0.83	0.913	0.996	1.079	1.162	1.245	1.328	1.411	1.494	1.577	1.66	1.743	1.826	1.909	1.992	2.075	
1000	0.279	0.372	0.465	0.558	0.651	0.744	0.837	0.93	1.023	1.116	1.209	1.302	1.395	1.488	1.581	1.674	1.767	1.86	1.953	2.046	2.139	2.232	2.325	
1100	0.309	0.412	0.515	0.618	0.721	0.824	0.927	1.03	1.133	1.236	1.339	1.442	1.545	1.648	1.751	1.854	1.957	2.06	2.163	2.266	2.369	2.472	2.575	
1200	0.339	0.452	0.565	0.678	0.791	0.904	1.017	1.13	1.243	1.356	1.469	1.582	1.695	1.808	1.921	2.034	2.147	2.26	2.373	2.486	2.599	2.712	2.825	
1300	0.369	0.492	0.615	0.738	0.861	0.984	1.107	1.23	1.353	1.476	1.599	1.722	1.845	1.968	2.091	2.214	2.337	2.46	2.583	2.706	2.829	2.952	3.075	
1400	0.399	0.532	0.665	0.798	0.931	1.064	1.197	1.33	1.463	1.596	1.729	1.862	1.995	2.128	2.261	2.394	2.527	2.66	2.793	2.926	3.059	3.192	3.325	
1500	0.429	0.572	0.715	0.858	1.001	1.144	1.287	1.43	1.573	1.716	1.859	2.002	2.145	2.288	2.431	2.574	2.717	2.86	3.003	3.146	3.289	3.432	3.575	
1600	0.459	0.612	0.765	0.918	1.071	1.224	1.377	1.53	1.683	1.836	1.989	2.142	2.295	2.448	2.601	2.754	2.907	3.06	3.213	3.366	3.519	3.672	3.825	
1700	0.489	0.652	0.815	0.978	1.141	1.304	1.467	1.63	1.793	1.956	2.119	2.282	2.445	2.608	2.771	2.934	3.097	3.26	3.423	3.586	3.749	3.912	4.075	
1800	0.519	0.692	0.865	1.038	1.211	1.384	1.557	1.73	1.903	2.076	2.249	2.422	2.595	2.768	2.941	3.114	3.287	3.46	3.633	3.806	3.979	4.152	4.325	
1900	0.549	0.732	0.915	1.098	1.281	1.464	1.647	1.83	2.013	2.196	2.379	2.562	2.745	2.928	3.111	3.294	3.477	3.66	3.843	4.026	4.209	4.392	4.575	
2000	0.579	0.772	0.965	1.158	1.351	1.544	1.737	1.93	2.123	2.316	2.509	2.702	2.895	3.088	3.281	3.474	3.667	3.86	4.053	4.246	4.439	4.632	4.825	
2100	0.609	0.812	1.015	1.218	1.421	1.624	1.827	2.03	2.233	2.436	2.639	2.842	3.045	3.248	3.451	3.654	3.857	4.06	4.263	4.466	4.669	4.872	5.075	
2200	0.639	0.852	1.065	1.278	1.491	1.704	1.917	2.13	2.343	2.556	2.769	2.982	3.195	3.408	3.621	3.834	4.047	4.26	4.473	4.686	4.899	5.112	5.325	
2300	0.669	0.892	1.115	1.338	1.561	1.784	2.007	2.23	2.453	2.676	2.899	3.122	3.345	3.568	3.791	4.014	4.237	4.46	4.683	4.906	5.129	5.352	5.575	
2400	0.699	0.932	1.165	1.398	1.631	1.864	2.097	2.33	2.563	2.796	3.029	3.262	3.495	3.728	3.961	4.194	4.427	4.66	4.893	5.126	5.359	5.592		



# GENERAL INFORMATION

## Materials:

Aluminum Extrusions to: BS 1474: 1987 Grade 6063  
General Thickness: Frame 2 mm  
Blade 1.5 mm  
Mullion 3 mm

Aluminium Sheet to: BS1470: 1987 5251 – H22  
General Thickness

Bird Screen (standard): Galvanised Mild Steel Weldmesh

Insect Screen (optional): Corlene (nylon reinforced mesh)  
Other materials available on request

## Finishes:

Mill Aluminum: Standard Finish

Anodised: To BS 1615

Colours: Satin Silver, Black, Bronze, Blue-Grey

Polyester Powder: To BS 6496 / BS 6497

Colours: BS 4800 & RAL ranges

Syntha Pulvin: By licensed approved applicator

Pvf2: By licensed approved applicator

Stockport Magistrates Court



# PRODUCT CODING

1 W SERIES											
2 FRAME		3 BLADE		4 ACCESSORIES		5 CILLS/HEADS		6 FIXING		7 FINISH	
O	None	O	None	O	None	O	None	O	None	O	None
C	Circular	A	Sheltered Exposure	B	Birdmesh	A	Cill Section for Flanged Frame	A	Screw Holes through the Face Flanges	P	Powder Coat - specify colour
D	Continuous Appearance Style Door	B	Moderate Exposure	F	Insect Mesh	B	Cill Section for Flangeless Frame	B	Screw Holes through the Frame Web	E	RAL 9010 Gloss
G	Glazing Style Louvre	S	Sand Trap	P	Blanking Plate	C	Weather Drip Cill Section	C	Fixing Strap / Bracket	F	RAL 9010 Matt
H	Framed Style Door	V	Severe Exposure	R	Bird Mesh + Blanking Plate	H	Weather Drip Head Section	1	<b>Special</b>	3	RAL 9006
L	Hinged Panel	1	<b>Special</b>	S	Insect Mesh + Blanking Plate	1	<b>Special</b>			8	Matt Black
M	Flanged Frame 100mm deep			X	Burglar Bars					A	Satin Silver Anodised
N	Flangeless Frame 100mm deep			1	<b>Special</b>					1	<b>Special</b>
P	Penthouse Louvre										
R	Flangless Frame 50mm deep										
S	Flanged Frame 50mm deep										
1	<b>Special</b>										

Experian - Nottingham





# LOUVRE APPLICATIONS

## COVENTRY UNIVERSITY LIBRARY



- Project:** COVENTRY UNIVERSITY LIBRARY
- Architect:** Short & Associates
- Consultant:** Environmental Design
- Client:** Emcor, Drake & Scull Eng.
- Louvre Type:** WNB
- Application:** Continuous low level Plenum Louvres having electrically controlled dampers.

## BUCKINGHAM BINGO



- Project:** BUCKINGHAM BINGO HUYTON
- Architect:** Business Environments
- Consultant:** D.S.S.R.
- Client:** Williams Tarr Construction
- Louvre Type:** W1A
- Application:** Arched Head Louvre assembly incorporating front removable access panels.

## CIS BUILDING - MANCHESTER



- Project:** CIS BUILDING MANCHESTER
- Architect:** Flood & Wilson Ltd
- Consultant:** Flood & Wilson Ltd
- Client:** C I S Limited
- Louvre Type:** W1B
- Application:** Self-supporting louvre screen having integral access doors



# LOUVRE APPLICATIONS

## MURRAYFIELD STADIUM - EDINBURGH



Photos courtesy of S.R.U

**Project:** MURRAYFIELD STADIUM  
EDINBURGH

**Architect:** The Miller Partnership

**Consultant:** J. A. Kirkpatrick

**Client:** Tilbury Douglas  
Construction

**Louvre Type:** WDB

**Application:** Low level louvre screening which includes a series of continuous appearance louvre doorsets

## TOUCHWOOD CENTRE - SOLIHULL



**Project:** TOUCHWOOD CENTRE  
SOLIHULL

**Architect:** BDG McColl

**Consultant:** W S P

**Client:** Haden Young Limited

**Louvre Type:** WPV

**Application:** Special Irregular Shaped Penthouse Louvres which include an integral supporting structure.

## DIAGEO PENSION TRUSTEE LTD - BASINGSTOKE



**Project:** DIAGEO PENSION TRUSTEE LTD  
BASINGSTOKE

**Architect:** Scott Brownrigg & Turner

**Client:** Pearce Construction Ltd

**Louvre Type:** WNB

**Application:** Louvre Screen to Chiller Plant and Services, for ventilation and architectural appearance.

# PRODUCT RANGES

GRILLES	DIFFUSERS	LOUVRES
Linear Bar	Linear Slot	External
Ceiling	Louvre Face	Circular
Sidewall	Sidewall	Door
Floor	Perforated Face	Screens
Computer Floor	Circular	Penthouse
Cill	Swirl	Sand Louvres
Single & Double Deflection	Ceiling	Roof Louvres
Egg Crate	Sidewall Fixed & Adjustable	
Hinged Core	Jet Flow / Nozzle	
Door Transfer	Repus Displacement Ventilation	
Security and Prison		
Supply and Extract Valves		

## BESPOKE SERVICE

We offer a bespoke design service where standard products do not fit the requirements of the build, we also supply products in special colours and finishes including bronze, brass, gold and chrome to meet Architectural design specifications.



ENGINEERED AIR  
PRODUCTS

### Colman Air Distribution Limited

Unit 7, High Carr Business Park  
Decade Close, Newcastle-Under-Lyme  
Stoke-on-Trent, Staffordshire ST5 7UH

Telephone: +44 (0)1782 564383  
[www.colmanad.com](http://www.colmanad.com)

We reserve the right to alter specifications without notice and products will sometimes be supplied with modifications which do not strictly comply with the descriptions and illustrations in this publication.